


ELECTRIC FAN HEATER

**B1,8 ECA**



## FUNCTIONING PRINCIPLES

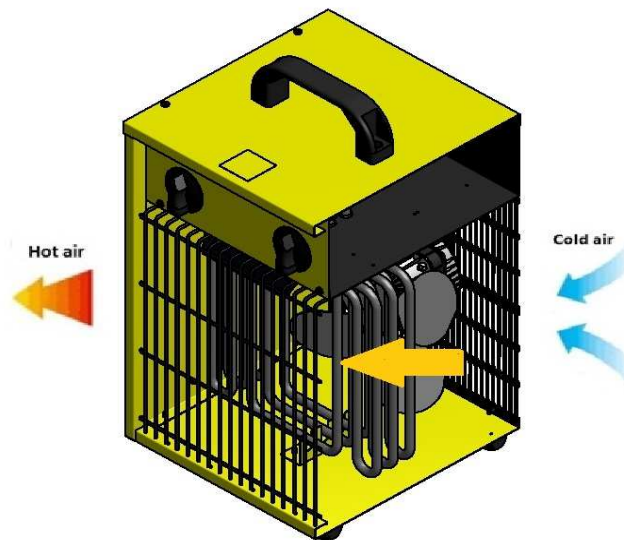

The device works on the principle of forced convection. The air flow is forced fan. Cold air is drawn in the back of the unit. Further, when flowing from the heater, it receives heat. The heated air is expelled in front of the heater. The device has a thermostat for the regulation of temperatures 5-35 °C. The unit area equipped with thermal protection is acting automatically.

## TECHNICAL DATA

Max capacity	kW	2	Power supply	V	230	
	Kcal/h	1720		Frequency	Hz	50
	Btu/h	6824			Rated current	A
Combustible	Power					
Net weight	kg	3,7				
Gross weight	kg	4,2				
Noisy level	dBa	50				
Air displacement	m <sup>3</sup> /h	184				

## PACKING

Dimensions packing	mm	235x210x340
Dimensions utilization	mm	220x200x330
Pieces for Euro-pallet	n°	75
Pieces per truck 80m <sup>3</sup>	n°	2475

## COMPONENTS

Heating elements	650W
Thermostat	Bimetallic
Fan	∅ 170mm
Thermal protection	85°C
Motor	Asynchronous, monophase, with impedance protection, counterclockwise rotation, 1300rpm

## ACCESSORIES

## WIRING DIAGRAM

L : Phase  
N : Neutral  
M : Motor

